

Now! with Teflon® HT
webbing protection!
Up to 25% longer service life for added savings.



MILLER®

New!

Miller® HP™ [High Performance] Series



Teflon® is a registered trademark of DuPont. Only DuPont makes Teflon®.

Introducing the new Miller® HP™ Series of Fall Protection Products, a collection of the most popular standard Miller brand full-body harnesses and shock-absorbing web lanyards enhanced with DuPont *Teflon*®HT.

An invisible finish professionally applied to the webbing in a very precise process, *Teflon*®HT provides superior water/oil repellency and protects against spills, stains, dirt and grime — extending the useful life of your fall protection equipment by approximately 25%.

Another added-value product enhancement available only from the leading brand in fall protection products and services — Miller.



Miller® HP™ Harnesses

Features:

- Durable, lightweight nylon or polyester webbing
- New DuPont *Teflon*®HT webbing finish provides superior protection and extends product service life
- Bright colors make the HP harnesses readily visible and easy to inspect
- Back strap prevents user from falling out of the harness
- Lanyard ring allows user to attach lanyard when not in use

Available Colors:



Green/black nylon webbing




Blue/black polyester webbing

Miller HP Harnesses

Harness Model No.	Sizes	Back D-Ring	Front D-Ring	Side D-Rings	Shoulder Strap Buckles	Leg Strap Buckles	Chest Strap Buckle	Sub-Pelvic Strap	Special Features	CSA Group
650T	S/M,Univ,XXL	Yes	Option	No	Friction	Mating	Mating	Yes	Lanyard ring; belt loops; <i>Teflon</i> ®HT	A
650T4	S/M,Univ,XXL	Yes	Option	No	Friction	Tongue	Mating	Yes	Lanyard ring; belt loops; <i>Teflon</i> ®HT	A
650T7	S/M,Univ,XXL	Yes	Option	Yes	Friction	Mating	Mating	Yes		A,P
650T58	S/M,Univ,XXL	Yes	Option	Yes	Friction	Tongue	Mating	Yes		A,P
650T76	S/M,Univ,XXL	Yes	Option	Yes	Friction	Tongue	Mating	Yes	Lanyard ring; belt loops; 6" CoolMax back pad/tool belt & CoolMax shoulder pads <i>(Shoulder pads not available on 650T77); Teflon</i> ®HT	A,P
650T77	S/M,Univ,XXL	Yes	Option	Yes	Friction	Tongue	Mating	Yes		A,P
552T	S/M,Univ,XXL	Yes	Yes	Yes	Mating	Mating	—	Yes	Lanyard ring; <i>Teflon</i> ®HT	A,P
552T4	S/M,Univ,XXL	Yes	Yes	Yes	Mating	Tongue	—	Yes		A,P
850T	S/M,Univ,XXL	Yes	No	No	Friction	Mating	Mating	Yes		A
850T4	S/M,Univ,XXL	Yes	No	No	Friction	Tongue	Mating	Yes		A
850T7	S/M,Univ,XXL	Yes	No	Yes	Friction	Mating	Mating	Yes	Lanyard ring; <i>Teflon</i> ®HT	A,P
850T58	S/M,Univ,XXL	Yes	No	Yes	Friction	Tongue	Mating	Yes		A,P

Note: For color/webbing selection, add one of the following suffixes to the corresponding harness model number:


- “-GK” for green/black nylon webbing
 - “-D” for blue/black polyester webbing
- (Example: 650T-GK)

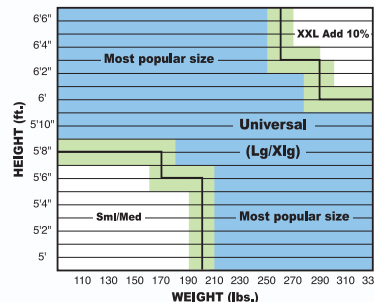

SIZING CHART

This sizing chart is to serve as a guide only. If your size falls in the orange shaded areas, you may choose either size depending on your preference. The larger size may be more appropriate if you are required to wear bulkier clothing. Contact Miller Customer Service with any questions, toll-free 800/873-5242.

Miller® Manyard® HP™ Shock-Absorbing Lanyards



With 20 years of design refinement, the "Original" Miller Manyard HP Shock-Absorbing Lanyards are unsurpassed in the market.

Features:

- Special woven shock-absorbing inner core reduces fall arrest forces below 900 lbs. compared to competitive lanyard at 1800 lbs
- Heavy-duty tubular outer jacket serves as a back-up web lanyard and has DuPont Teflon® HT webbing finish that provides superior protection and extends product service life
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and should be removed from service



Miller Manyard HP Shock-Absorbing Lanyards

Model No.	Material	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Standard Lanyard Length*
216TWLS	Webbing	One	Locking snap hook	Locking snap hook	Teflon® HT; Warning flag	6' (1.8m)
219TWRS	Webbing	One	Locking snap hook	Locking rebar hook (2-1/2")	Teflon® HT; Warning flag	6' (1.8m)
231TWRS	Webbing	Two	Locking snap hook	Two locking rebar hooks (2-1/2")	Teflon® HT; Warning flag	6' (1.8m)
232TWLS	Webbing	Two	Locking snap hook	Two locking snap hooks	Teflon® HT; Warning flag	6' (1.8m)
233TWLS	Webbing	One	Web choke-off loop	Locking snap hook	Teflon® HT; Warning flag	6' (1.8m)
233TWRS	Webbing	One	Web choke-off loop	Locking rebar hook (2-1/2")	Teflon® HT; Warning flag	6' (1.8m)
266TWLS	Webbing	Two	Web choke-off loop	Two locking snap hooks	Teflon® HT; Warning flag	6' (1.8m)
266TWRS	Webbing	Two	Web choke-off loop	Two locking rebar hooks (2-1/2")	Teflon® HT; Warning flag	6' (1.8m)


*Available in lengths from 4' (1.2m) to 10' (3m).

Note: For color/webbing selection, add one of the following suffixes to the corresponding lanyard model number:

■ "-GN" for green nylon webbing

■ "-D" for blue polyester webbing

(Example: 216TWLS-GN)

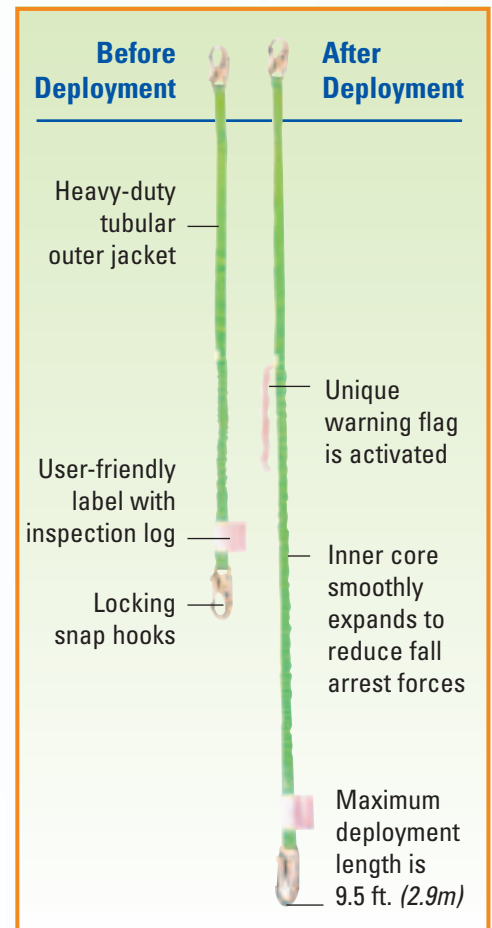

Miller® HP™ Lanyards w/SofStop® Shock Absorbers

Teflon® HT
high-tech fabric protector



Features:

- The versatile Miller SofStop® Shock Absorber pack is an integral component of Miller brand web lanyards
- New DuPont Teflon® HT webbing finish provides superior protection and extends product service life



913TWLS



8798T



8798TR

Miller HP Lanyards with SofStop Shock Absorbers

Model Number	Material	Number of Legs	Harness Connection	Anchorage Connection	Lanyard Length	Special Features
910TWLS	Nylon webbing	One	Locking snap hook	Locking snap hook	4' (1.2m) to 6' (1.8m)	Adjustable; Teflon® HT
913TWLS	Nylon webbing	One	Locking snap hook	Locking snap hook	6' (1.8m)	Teflon® HT
226TWRS	Nylon webbing	One	Locking snap hook	Locking rebar hook (2-1/2")	6' (1.8m)	Teflon® HT
8798T	Nylon webbing	Two	Locking snap hook	Two locking snap hooks	6' (1.8m)	Teflon® HT
8798TR	Nylon webbing	Two	Locking snap hook	Two locking rebar hooks (2-1/2")	6' (1.8m)	Teflon® HT
8878T	Nylon webbing	Two	Locking snap hook	Two locking snap hooks	4' (1.2m) to 6' (1.8m)	Adjustable; Teflon® HT
8878TR	Nylon webbing	Two	Locking snap hook	Two locking rebar hooks (2-1/2")	4' (1.2m) to 6' (1.8m)	Adjustable; Teflon® HT

Note: For color/webbing selection, add one of the following suffixes to the corresponding lanyard model number:

■ "-GN" for green nylon webbing ■ "D" for blue polyester webbing

(Example: 910TWLS-GN)

Miller brand products meet all applicable OSHA, ANSI and  requirements, including ANSI Z359.1

Other Miller products with Teflon® HT finish:



DuraFlex®
Stretchable Harness



DuraFlex®
Python™ Harness



BackBiter™
Tie-Back Lanyard



StretchStop®
Shock-Absorbing Lanyard



Manyard® II
Shock-Absorbing Lanyard



MiniLite™
Fall Limiter



MightyLite
Self-Retracting
Lifeline

MILLER®

Toll Free 800/873-5242 Fax 800/892-4078
Phone 814/432-2118 Fax 814/432-2415



Franklin, PA - ISO 9001
Trenton, ON, CN - 9002

For more information or to place an order,
please contact your Miller® distributor:

LHPS/0902/20M/RPI